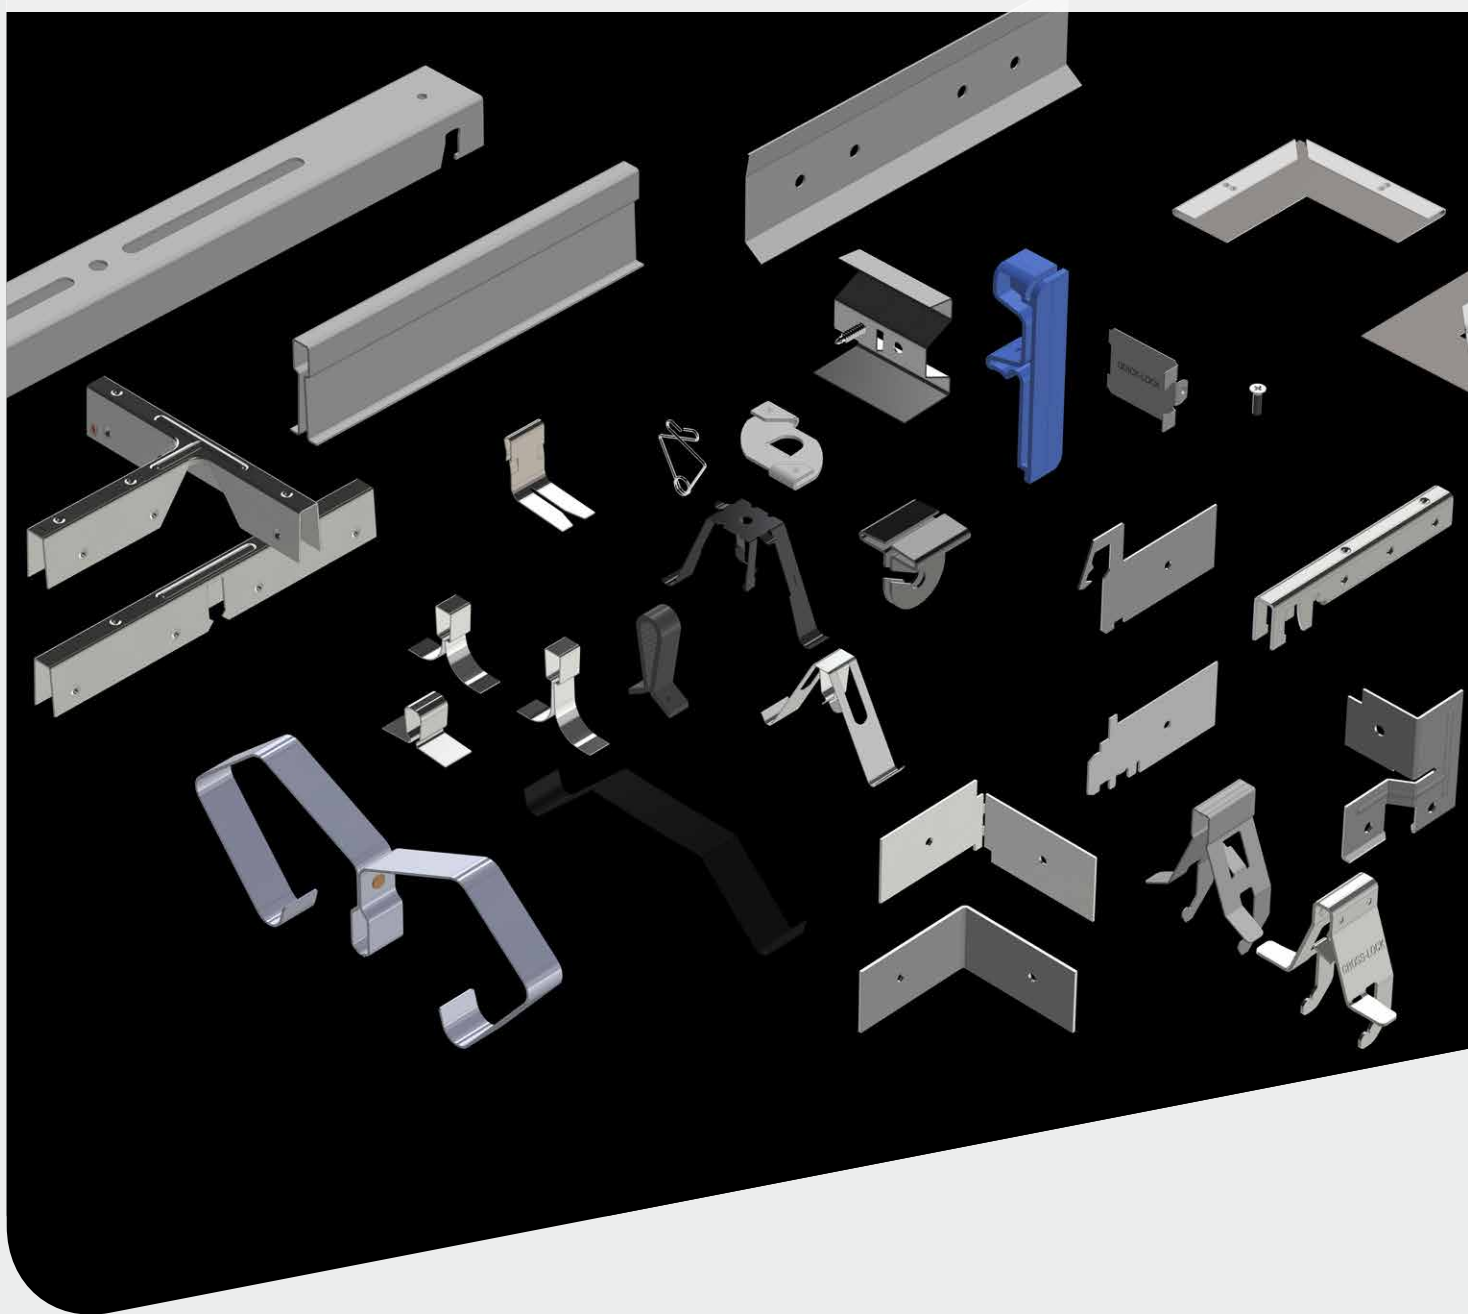
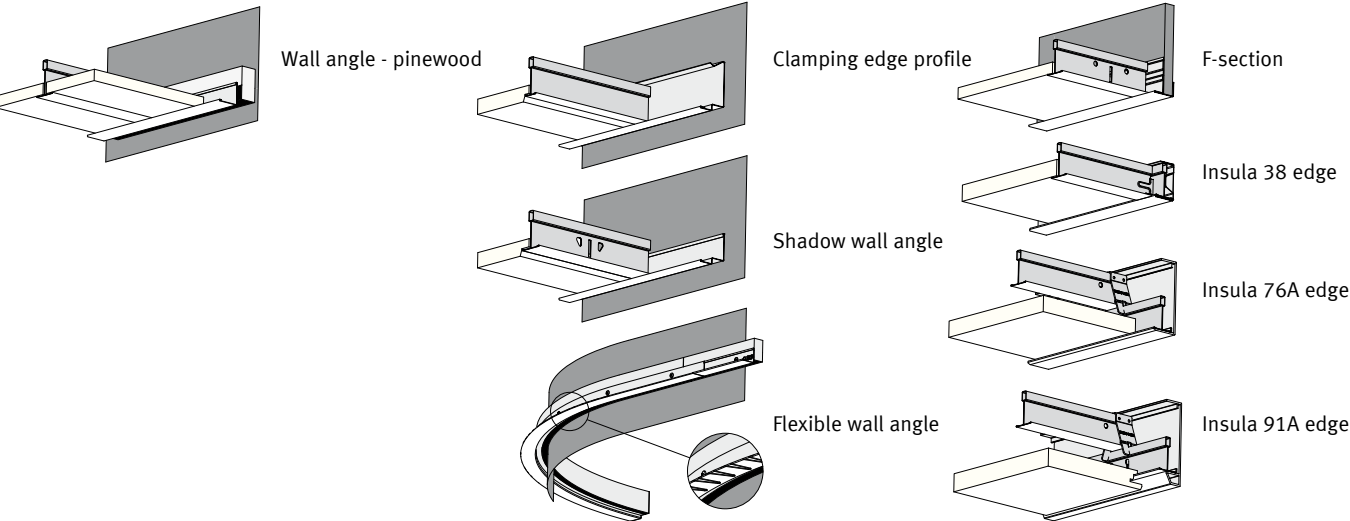


ACCESSORIES

QUICK-LOCK®



QUICK-LOCK® Wall angles & ceiling edges



Component, dimensions in mm	Product No.	Description	Length mm	Qty/ Pack	R- Mtr/ pack	Weight/ pack	Logistic code
-----------------------------	-------------	-------------	-----------	-----------	--------------	--------------	---------------

Wall angle 19 x 24 mm

41 33 101	Snow-white	3000	30	90	16.2	A
41 33 119	Snow-white ultra matt	3000	30	90	16.2	A
41 33 535	Snow-white Corro-Plus	3000	30	90	16.2	A
41 33 103	RAL 9005 (black)*	3000	30	90	16.2	A
41 33 116	Black, ultra matt	3000	30	90	16.2	A
41 33 111	RAL 9006 (silver)*	3000	30	90	16.2	A
41 33 105	Brushed aluminium	3000	30	90	7.6	A

Wall angle 24 x 24 mm

41 02 010	Snow-white	1500	40	60	12.0	C
41 33 301	Snow-white	3000	30	90	18.2	A
41 33 306	RAL 9010 (white)*	3000	30	90	18.2	A

For wall angle 24 x 24 on size see page 39.

Wall angle 32 x 24 mm

41 33 401	Snow-white	3000	30	90	21.8	B
-----------	------------	------	----	----	------	---

Timber wall trim

42 24 013	Pinewood, black 18 x 35 mm	3000	10	30	9.4	B
42 24 000	Pinewood, white 18 x 35 mm	3000	10	30	9.4	B

* RAL-colors: minor deviations to the RAL standard can not be excluded

QUICK-LOCK® Shadow mouldings, edge profiles and column rings

Component, dimensions in mm	Product No.	Description	Length mm	Qty/ Pack	R- Mtr/ pack	Weight/ pack	Logistic code
-----------------------------	-------------	-------------	-----------	-----------	--------------	--------------	---------------

Flexibel wall angle

42 00 037	24 x 24 mm, white*	2500	10	25	4.5	B
Bendable and intended for mounting on “convex” walls. Minimum radius 200 mm. The punched steel profile is covered with flexible white PVC. The punches will come in visible to a limited extent.						

Shadow moulding

41 40 018	Snow-white, 24 x 12 x 12 x 24 mm	3000	25	75	24.8	B
-----------	----------------------------------	------	----	----	------	---

41 40 016	Snow-white, 25 x 15 x 8 x 15 mm	3000	25	75	22.2	B
-----------	---------------------------------	------	----	----	------	---

41 40 017	Snow-white, 27 x 15 x 6 x 15 mm	3000	25	75	22.2	A
-----------	---------------------------------	------	----	----	------	---

Clamping edge profile

41 33 900	Snow-white, 6 mm	3000	20	60	29.0	B
-----------	------------------	------	----	----	------	---

Outside corner profile

41 33 800	27 x 41 x 13 mm	3000	24	72	26.0	B
Perforations 300 mm c.t.c.						

Column rings

**	Aluminium 30 x 20 x 2 mm, white*					C
Diameter 135 - 1170 mm						
To be cut on the job site						
Different shapes and dimensions on demand						

* Minor color deviation from snow-white

** On demand.

QUICK-LOCK® Quick-suspenders

Component, dimensions in mm	Product No.	Description	Length mm	Qty/ Pack	R- Mtr/ pack	Weight/ pack	Logistic code
	Quick suspender with 2 hooks						
	42 04 350	Reach 120-160 mm		100		3.6	A
	42 04 351	Reach 135-190 mm		100		4.0	A
	42 04 352	Reach 190-300 mm		100		5.0	A
	42 04 353	Reach 235-400 mm		100		6.0	A
	42 04 354	Reach 340-600 mm		100		8.0	A
	42 04 356	Reach 530-990 mm		100		12.0	A
	42 04 357	Reach 650-1230 mm		100		14.0	A
	42 04 358	Reach 775-1480 mm		100		16.0	A
	42 04 359	Reach 920-1770 mm		100		18.0	A
	42 04 360	Reach 1040-2010 mm		100		20.0	A
	Quick suspenders 38 hook						
	42 04 374	Insula 38 reach 340-600 mm		100		8.0	B
	42 04 376	Insula 38 reach 530-990 mm		100		12.0	B
	Quick-Lock slide for Quick-Lock						
	40 00 006	For quick suspender		100		3.0	B
	42 50 403	Slide for M6 attachment		100		1.4	C
	Direct hanger						
	42 05 360	Direct hanger adjustable DAH 45-75 (without hanger pin)		100		3.0	B
	Direct hanger						
	42 05 372	Direct hanger DAH 45 (h)		100		2.9	C
	42 05 373	Direct hanger DAH 55 (h)		100		3.1	C
	42 05 374	Direct hanger DAH 75 (h)		100		3.6	C
	42 05 375	Direct hanger DAH 95 (h)		100		4.1	C

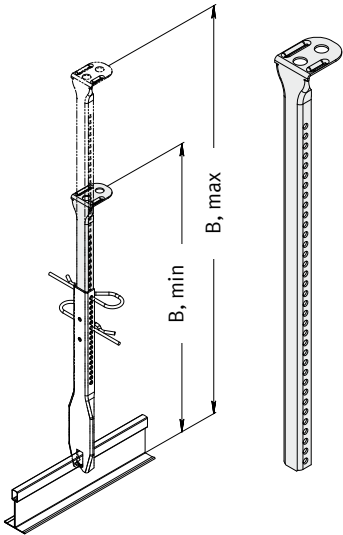
QUICK-LOCK® Nonius hangers

Component, dimensions in mm	Product No.	Description	Length mm	Qty/ Pack	R- Mtr/ pack	Weight/ pack	Logistic code
	Nonius hanger, top part*						
	Reach A		Reach B				
	42 04 250	175-195 mm	225-250 mm	130	100	5.0	A
	42 04 251	175-245 mm	225-300 mm	200	100	6.0	A
	42 04 252	255-350 mm	230-400 mm	300	100	8.0	A
	42 04 253	360-460 mm	395-515 mm	400	100	11.0	A
	42 04 254	460-560 mm	495-615 mm	500	100	13.0	A
	42 04 255	560-660 mm	595-715 mm	600	100	16.0	A
	42 04 256	660-760 mm	695-815 mm	700	100	18.0	A
	42 04 257	750-840 mm	795-915 mm	800	100	20.0	A
	42 04 258	860-960 mm	895-1015 mm	900	100	22.0	A
	42 04 259	950-1060 mm	995-1115 mm	1000	100	24.0	A
	Reach = bottom construction ceiling - bottom suspended ceiling						
	A-Combined with nonius hanger bottom part for Omega profile						
	B-Combined with nonius hanger bottom part for T-section						
	Hanger pin						
	42 05 551	Hanger pin single		100		0.7	A
	Advised: two hanger pins per hanger*						
	42 05 555	Hanger pin double		100		0.7	B
	Nonius hanger bottom part for T-section*						
	42 04 211	Nr 228, for Quick-Lock 15, 24 and 35	210	100		4.5	B
	Nonius hanger bottom part for Omega*						
	42 04 200	for Omega 50 mm	135	100		4.0	B
	42 04 202	for Omega 100 mm	135	100		5.6	A
	42 04 204	for Omega 150 mm	135	100		8.0	B
	Nonius bottom part; bolt fixation*						
	42 04 212	Prepunched	190	100		4.0	C
	Nonius extension piece*						
	42 04 270	Connector for extension piece	95	100		1.5	C
	42 04 280	Universal	3000	25		18.0	C

* The nonius parts have to overlap at least 50 mm.

QUICK-LOCK® Nonius hangers, connectors • corrosion resistant

Component, dimensions in mm	Product No.	Description	Length mm	Qty/ Pack	R- Mtr/ pack	Weight/ pack	Logistic code
-----------------------------	-------------	-------------	--------------	--------------	-----------------	-----------------	------------------



Nonius hanger, top part Corrosion resistant¹ C3L

Reach*

43 04 252	230-400 mm	300	50	4.0	C
43 04 253	395-515 mm	400	50	5.5	C
43 04 254	495-615 mm	500	50	6.5	C
43 04 255	595-715 mm	600	50	8.0	C

Reach = bottom construction ceiling - bottom suspended ceiling system
* Combined with Nonius hanger bottom part for T-section

Hanger pin Corrosion resistant¹ C3L

43 04 551	Advised: two hanger pins per hanger*	72	100	0.7	C
-----------	--------------------------------------	----	-----	-----	---

Nonius hanger bottom part for T-profile Corrosion resistant¹ C3L

43 04 211	Nr 228, for Quick-Lock 15, 24 and 35	210	50	2.5	C
-----------	--------------------------------------	-----	----	-----	---

Nonius hanger, top part Corrosion resistant¹ C5L

Reach*

43 05 252	230-400 mm	300	50	4.0	C
43 05 253	395-515 mm	400	50	5.5	C
43 05 254	495-615 mm	500	50	6.5	C
43 05 255	595-715 mm	600	50	8.0	C

Reach = bottom construction ceiling - bottom suspended ceiling system
* Combined with Nonius hanger bottom part for T-section

Hanger pin Corrosion resistant¹ C5L

43 05 551	Advised: two hanger pins per hanger*	72	100	0.7	C
-----------	--------------------------------------	----	-----	-----	---

Nonius hanger bottom part for T-profile Corrosion resistant¹ C5L

43 05 211	Nr 228, for Quick-Lock 15, 24 and 35	210	50	2.5	C
-----------	--------------------------------------	-----	----	-----	---

Cross-Lock connector²

43 33 700	Cross-Lock connector extra corrosion resistant, black	100		2.1	A
-----------	--	-----	--	-----	---

- 1 The extra corrosion resistant Nonius Hangers are available in two versions:
- C-3L meets the Class C specifications, see EN 13964, table 8 and the Class C-3L requirements, see EN 12944.
 - C-5L Intended for Class D applications, see EN 13964. Suitable for use in C-5L environments, see EN 12944-2. Meets Building Recommendations guideline 3.6 for swimming pool ceilings in the Netherlands.

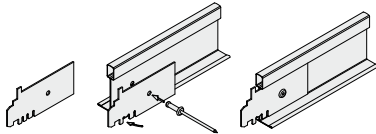
The degree of corrosion resistance depends on the local conditions. The suitability and anticipated lifespan should be assessed by a professional. Periodic inspections may be necessary under the legislation or regulations for the early detection of any corrosion.

* The nonius parts have to overlap at least 50 mm.

- 2 Cross-Lock with an additional black corrosion protective coating.
Tested c.f. EN ISO 9227 (salt spray test). Test result on demand.

QUICK-LOCK® Connectors, adaptors

Component, dimensions in mm	Product No.	Description	Length mm	Qty/ Pack	R- Mtr/ pack	Weight/ pack	Logistic code
-----------------------------	-------------	-------------	--------------	--------------	-----------------	-----------------	------------------





Cross-connection T-profiles

40 00 020	For use with T-profile straight end, for cross connection in slot. Quick-Lock 15, 24, 35 profiles	100		1.0	A
-----------	---	-----	--	-----	---

T-profile

42 04 311	T-profile	100		2.6	C
-----------	-----------	-----	--	-----	---





Corner cover clip wall angle 24 mm

42 01 067	Inside corner, snow-white	70		0.7	A
42 01 066	Outside corner, snow-white	100		1.0	A

Quick-Lock Connecting brackets

40 00 013	Standard connector, 50 x 50 mm for Quick-Lock 15, 24/38 profiles	100		2.5	A
-----------	---	-----	--	-----	---





Connecting brackets Omega profiles

40 04 009	For cross connection T-profiles Omega visible system	90	100	2.5	A
-----------	---	----	-----	-----	---

Quick-Lock splice

40 04 000	For Quick-Lock 38 mm	150	25	1.0	B
-----------	----------------------	-----	----	-----	---








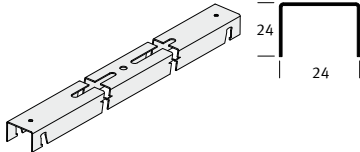


Main beam adapters*, snow-white

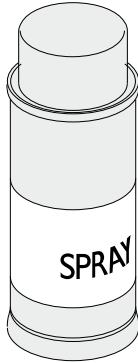
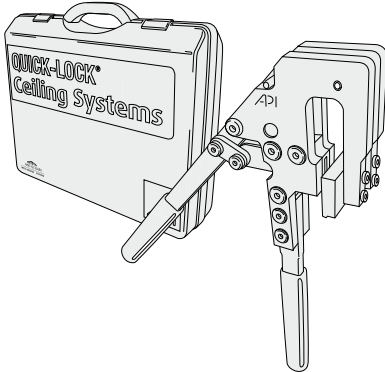

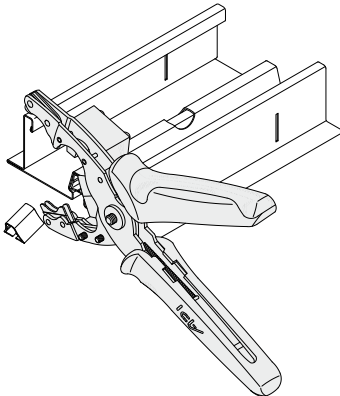
**	Profile to change grid orientation 90° Length, leadtime on demand				
----	--	--	--	--	--

- * Adapters for other Quick-Lock profiles and colors upon request.
** On demand.

QUICK-LOCK® Clips and accessories

Component, dimensions in mm	Product No.	Description	Length mm	Qty/ Pack	R- Mtr/ pack	Weight/ pack	Logistic code
	Cross tee clip TS						
	42 06 030	Stabilizing clip for single cross tee connection		50		0.5	B
	Panel clip						
	42 05 523	For 12- 22 mm panels		100		0.3	B
	Panel clip						
	42 05 530	Synthetic for panels 5-20mm suitable for corrosion-resistant application		500		1.0	B
	Panel clip						
	42 05 545	For 9-16 mm panels - demountable		500		1.9	B
	Panel clip						
	42 05 541	For 9-16 mm panels - not demountable		500		2.5	B
	Twist clip with hanger ring						
	42 05 511	For T-section 24 mm		25		0.2	B
	Wall spring						
	42 06 005	Wall spring		100		0.8	B
	Panel clip						
	42 05 560	For impact resistant systems 20-40 mm panel		100		4.5	C
	Reinforcement bracket						
	42 04 310	For cross connections in impact resistant systems		100		3.5	C
	Quick-Lock bridge spacer						
	42 04 320	Quick-Lock bridge spacer 300		10			C
	42 04 325	Quick-Lock bridge spacer 600		10			C

QUICK-LOCK® Miscellaneous

Component, dimensions in mm	Product No.	Description	Length mm	Qty/ Pack	R- Mtr/ pack	Weight/ pack	Logistic code
	Aerosol						
	53 02 001	Snow-white, 0.25 kg		1		0.3	A
	53 02 906	RAL 9006 (silver), 0.25 kg		1		0.3	B
	Universal slotpunch						
	53 02 910	RAL 9010 (white), 0.25 kg		1		0.3	A
	53 02 911	RAL 9005 (black), 0.25 kg		1		0.3	B
	Spare parts (other parts on demand)						
	Other RAL colors on demand.						
	79 00 040	For perforation of slots in Quick-Lock, Omega and Omega Plus profiles.		1			B
	Omega-Plus scissors						
	79 00 041	Slot punch 1.1 Quick-Lock 24-32, 38, 60		1			C
	79 00 042	Slot punch 2 Omega		1			C
	** On demand.						
	79 00 044	Slot die A Quick-Lock 24-32, 38		1			C
	79 00 043	Slot die B Quick-Lock 24/60		1			C
	Omega-Plus scissors						
	79 00 045	Slot die C Omega		1			C
	79 00 046	Spring for slotpunch		1			C
	Omega-Plus scissors						
	79 00 047	Punch guiding plate		1			C
	Omega-Plus scissors						
	79 00 032	For cutting the Omega-Plus infill strip		1			C



Ecophon is the leading supplier of indoor acoustic solutions that improve working performance and quality of life. We believe in the difference sound can make to our everyday lives, and are passionate advocates for the importance of room acoustics to people's wellbeing – whatever the space, activity or need.

Having a sound effect on people is the principle that guides all we do. We're proud of the Swedish heritage and human approach that promise is founded on. Our uncompromising commitment to transparent sustainable practice. And, as members of the Saint-Gobain Group, to be doing our part in making the world a better home.